

BATISCAFO Zero45 Diving Watch Manual

(Suitable for watches with a crown guard and Seiko NH35A or ETA 2824 movement)

I. WATCH OVERVIEW

This diving watch is equipped with an automatic mechanical movement and a crown guard system to ensure water resistance. It offers both self-winding and manual winding capabilities.

Main Features:

- Water Resistance: 300m (30 ATM)
- Screw-down crown with crown guard
 - Date window
- Automatic movement (NH35A or ETA 2824)
- Luminous hands and markers for visibility underwater

II. SETTING THE TIME AND DATE

1. Unlock the Crown

- Flip the crown guard lever upward to release the crown.
- Unscrew the crown counterclockwise (if applicable) to disengage the screw-down mechanism.

2. Manual Winding (Optional)

- The watch will automatically wind itself when worn.

3. Setting the Time

- Pull the crown to Position 2 (second click).
 - Turn the crown to set the correct time.
- Push the crown back in to restart the watch.

4. Setting the Date (if applicable)

- Pull the crown to Position 1 (first click).
- Turn the crown clockwise to adjust the date.
- Note: Never adjust the date between 9 PM and 3 AM to avoid damaging the movement.

III. USING THE CROWN GUARD

- After setting the time and date, push the crown back in and screw it clockwise to ensure it is sealed.
- Lower the crown guard lever to lock the crown in place.
- This ensures water resistance and protects the crown from accidental impacts.

IV. WATER RESISTANCE

- Ensure the crown is fully locked and the crown guard is engaged before exposing the watch to water.
 - Do not operate the crown underwater.
- Regular maintenance (every 2-3 years) is recommended to check the watch's water resistance seals.

V. LUMINOUS FUNCTION

- The watch features luminous hands and markers for visibility in low-light conditions.
- For maximum brightness, expose the watch to light before diving.

VI. AUTOMATIC MOVEMENT CARE

- The Seiko NH35A and ETA 2824 movements are designed to be durable and reliable.
 - Power reserve:
 - NH35A: ~41 hours
 - ETA 2824: ~38-40 hours
- To keep the movement functioning optimally, wear the watch


VII. MAINTENANCE TIPS

- Avoid exposing the watch to extreme temperatures or magnetic fields.
- Rinse the watch with fresh water after diving in saltwater.
- Have your watch serviced by a professional watchmaker every 3-5 years to maintain accuracy and water resistance.


DISCLAIMER:

This watch is a precision instrument. Improper handling or neglect can affect its performance. Always ensure the crown is locked before water exposure.


Setting Up the Watch with screwed crown

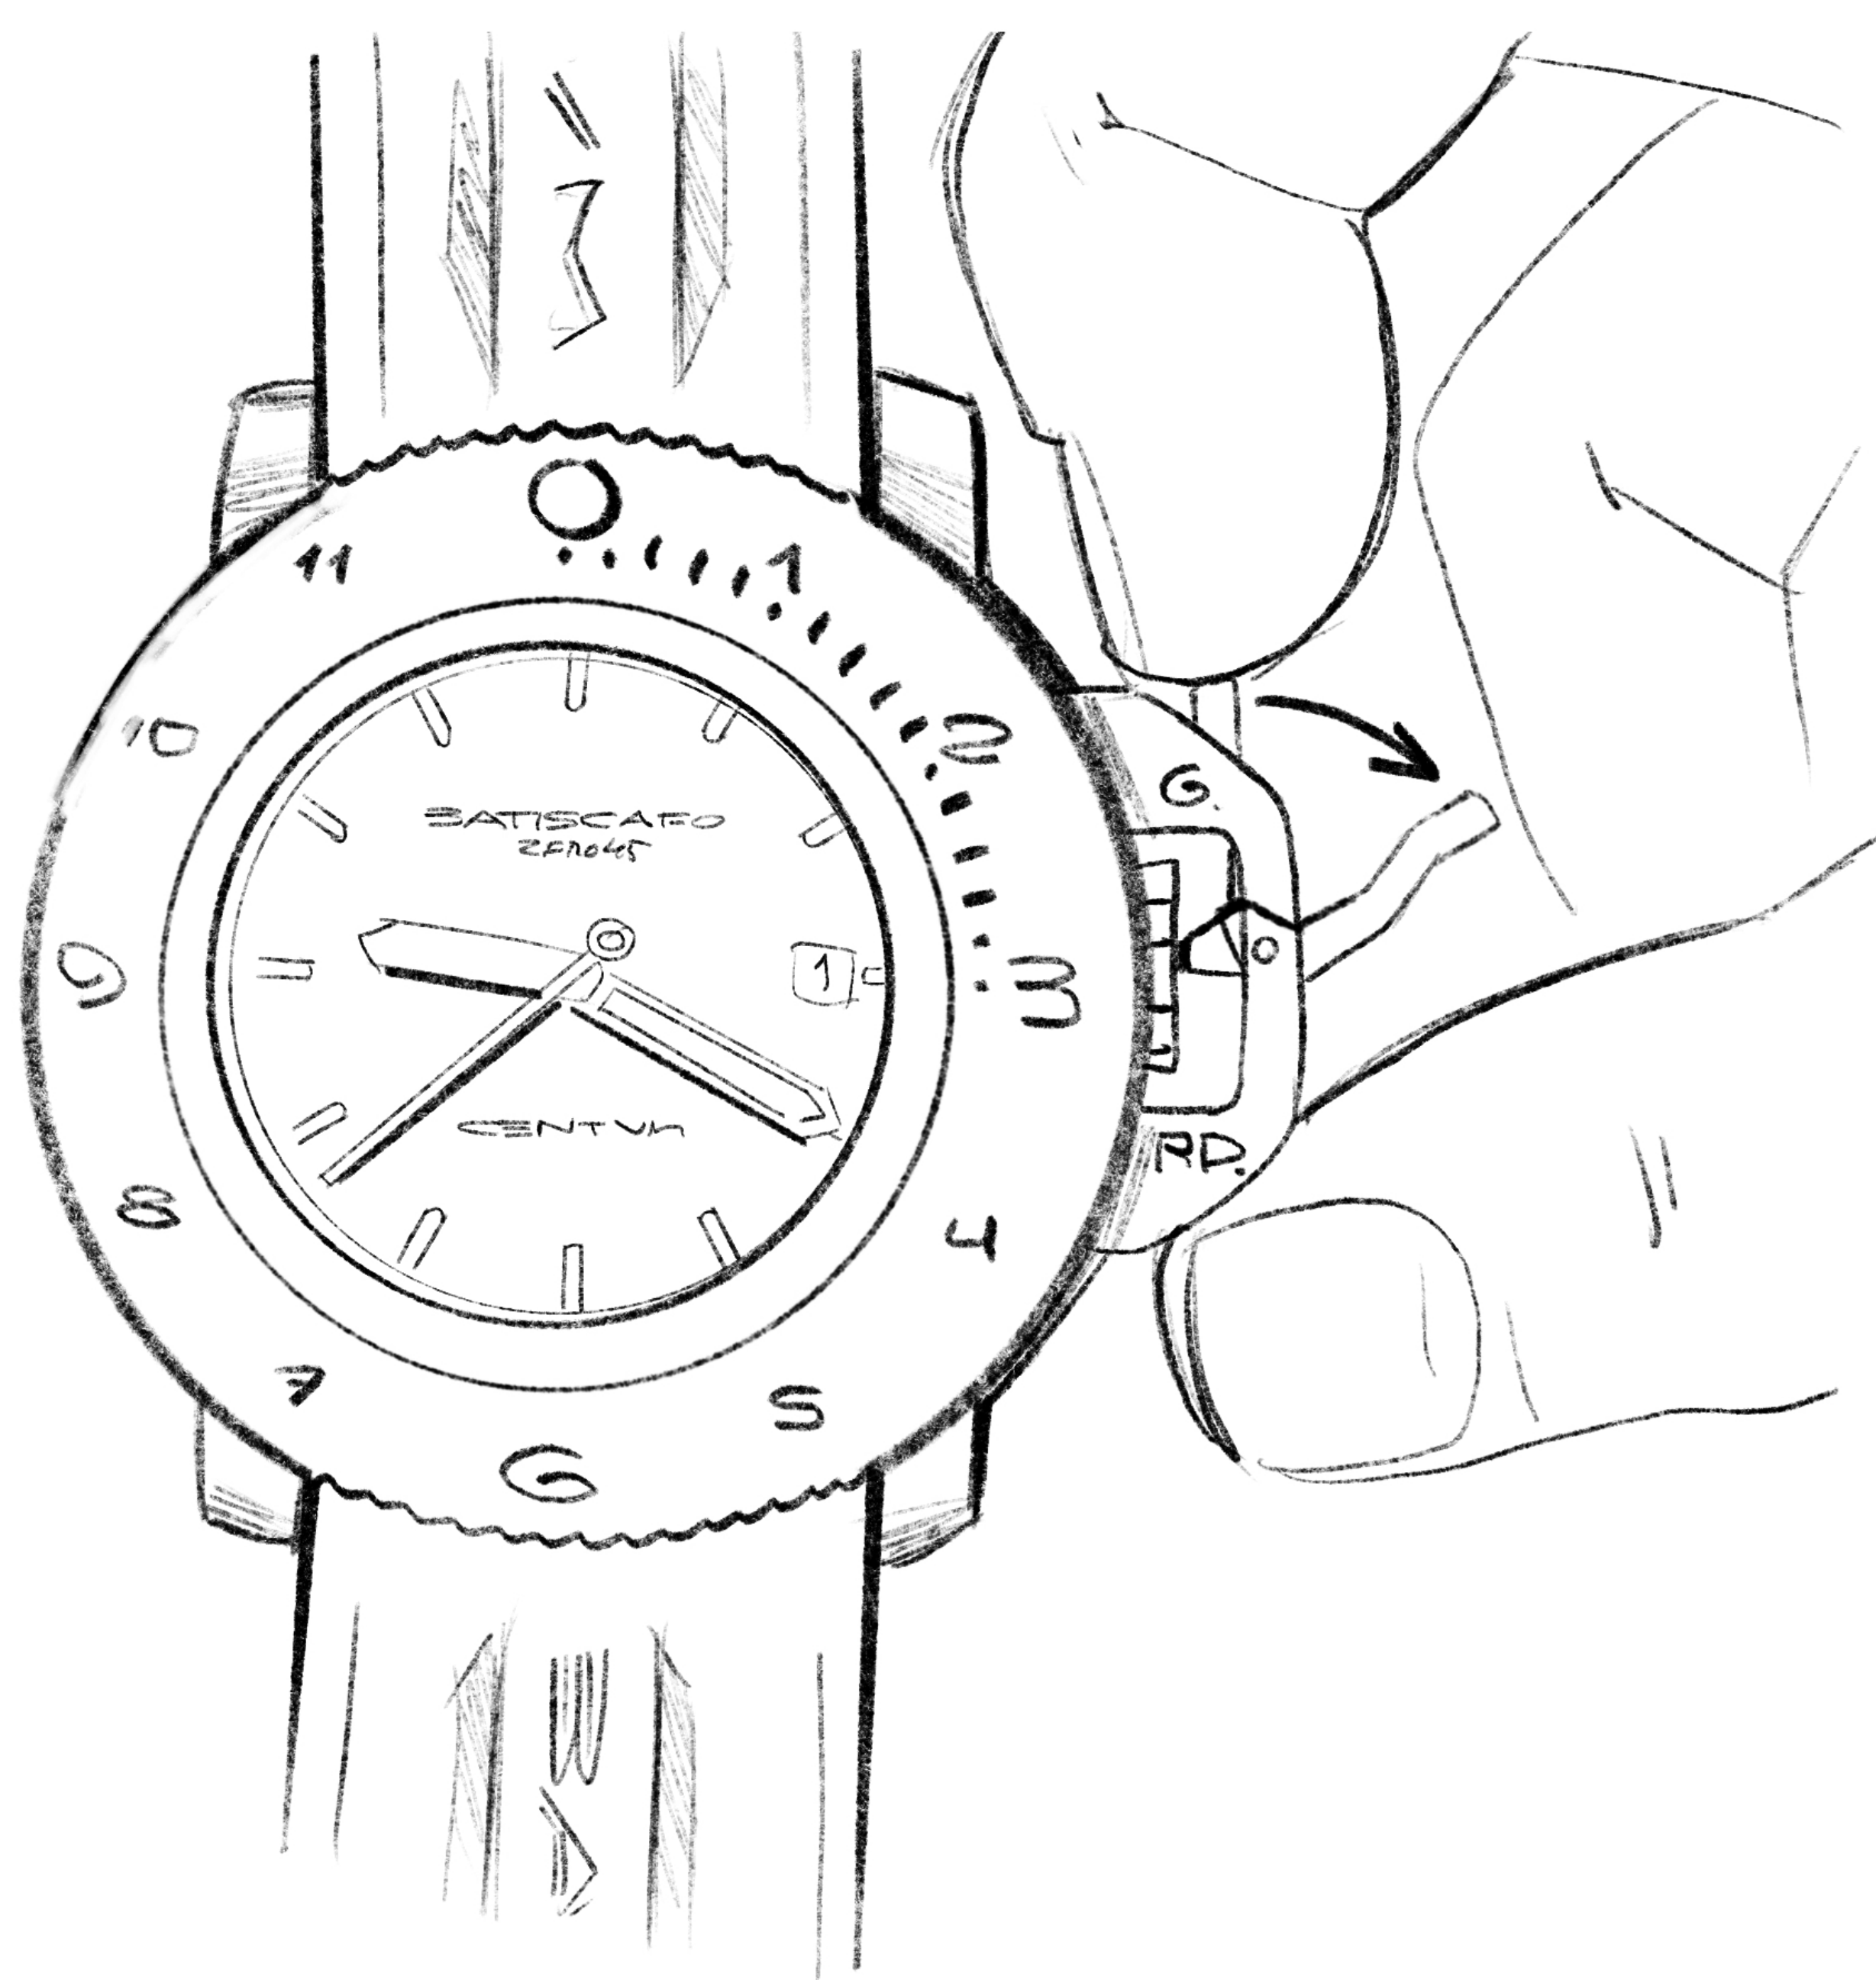


Tilt out crown guard
buckle

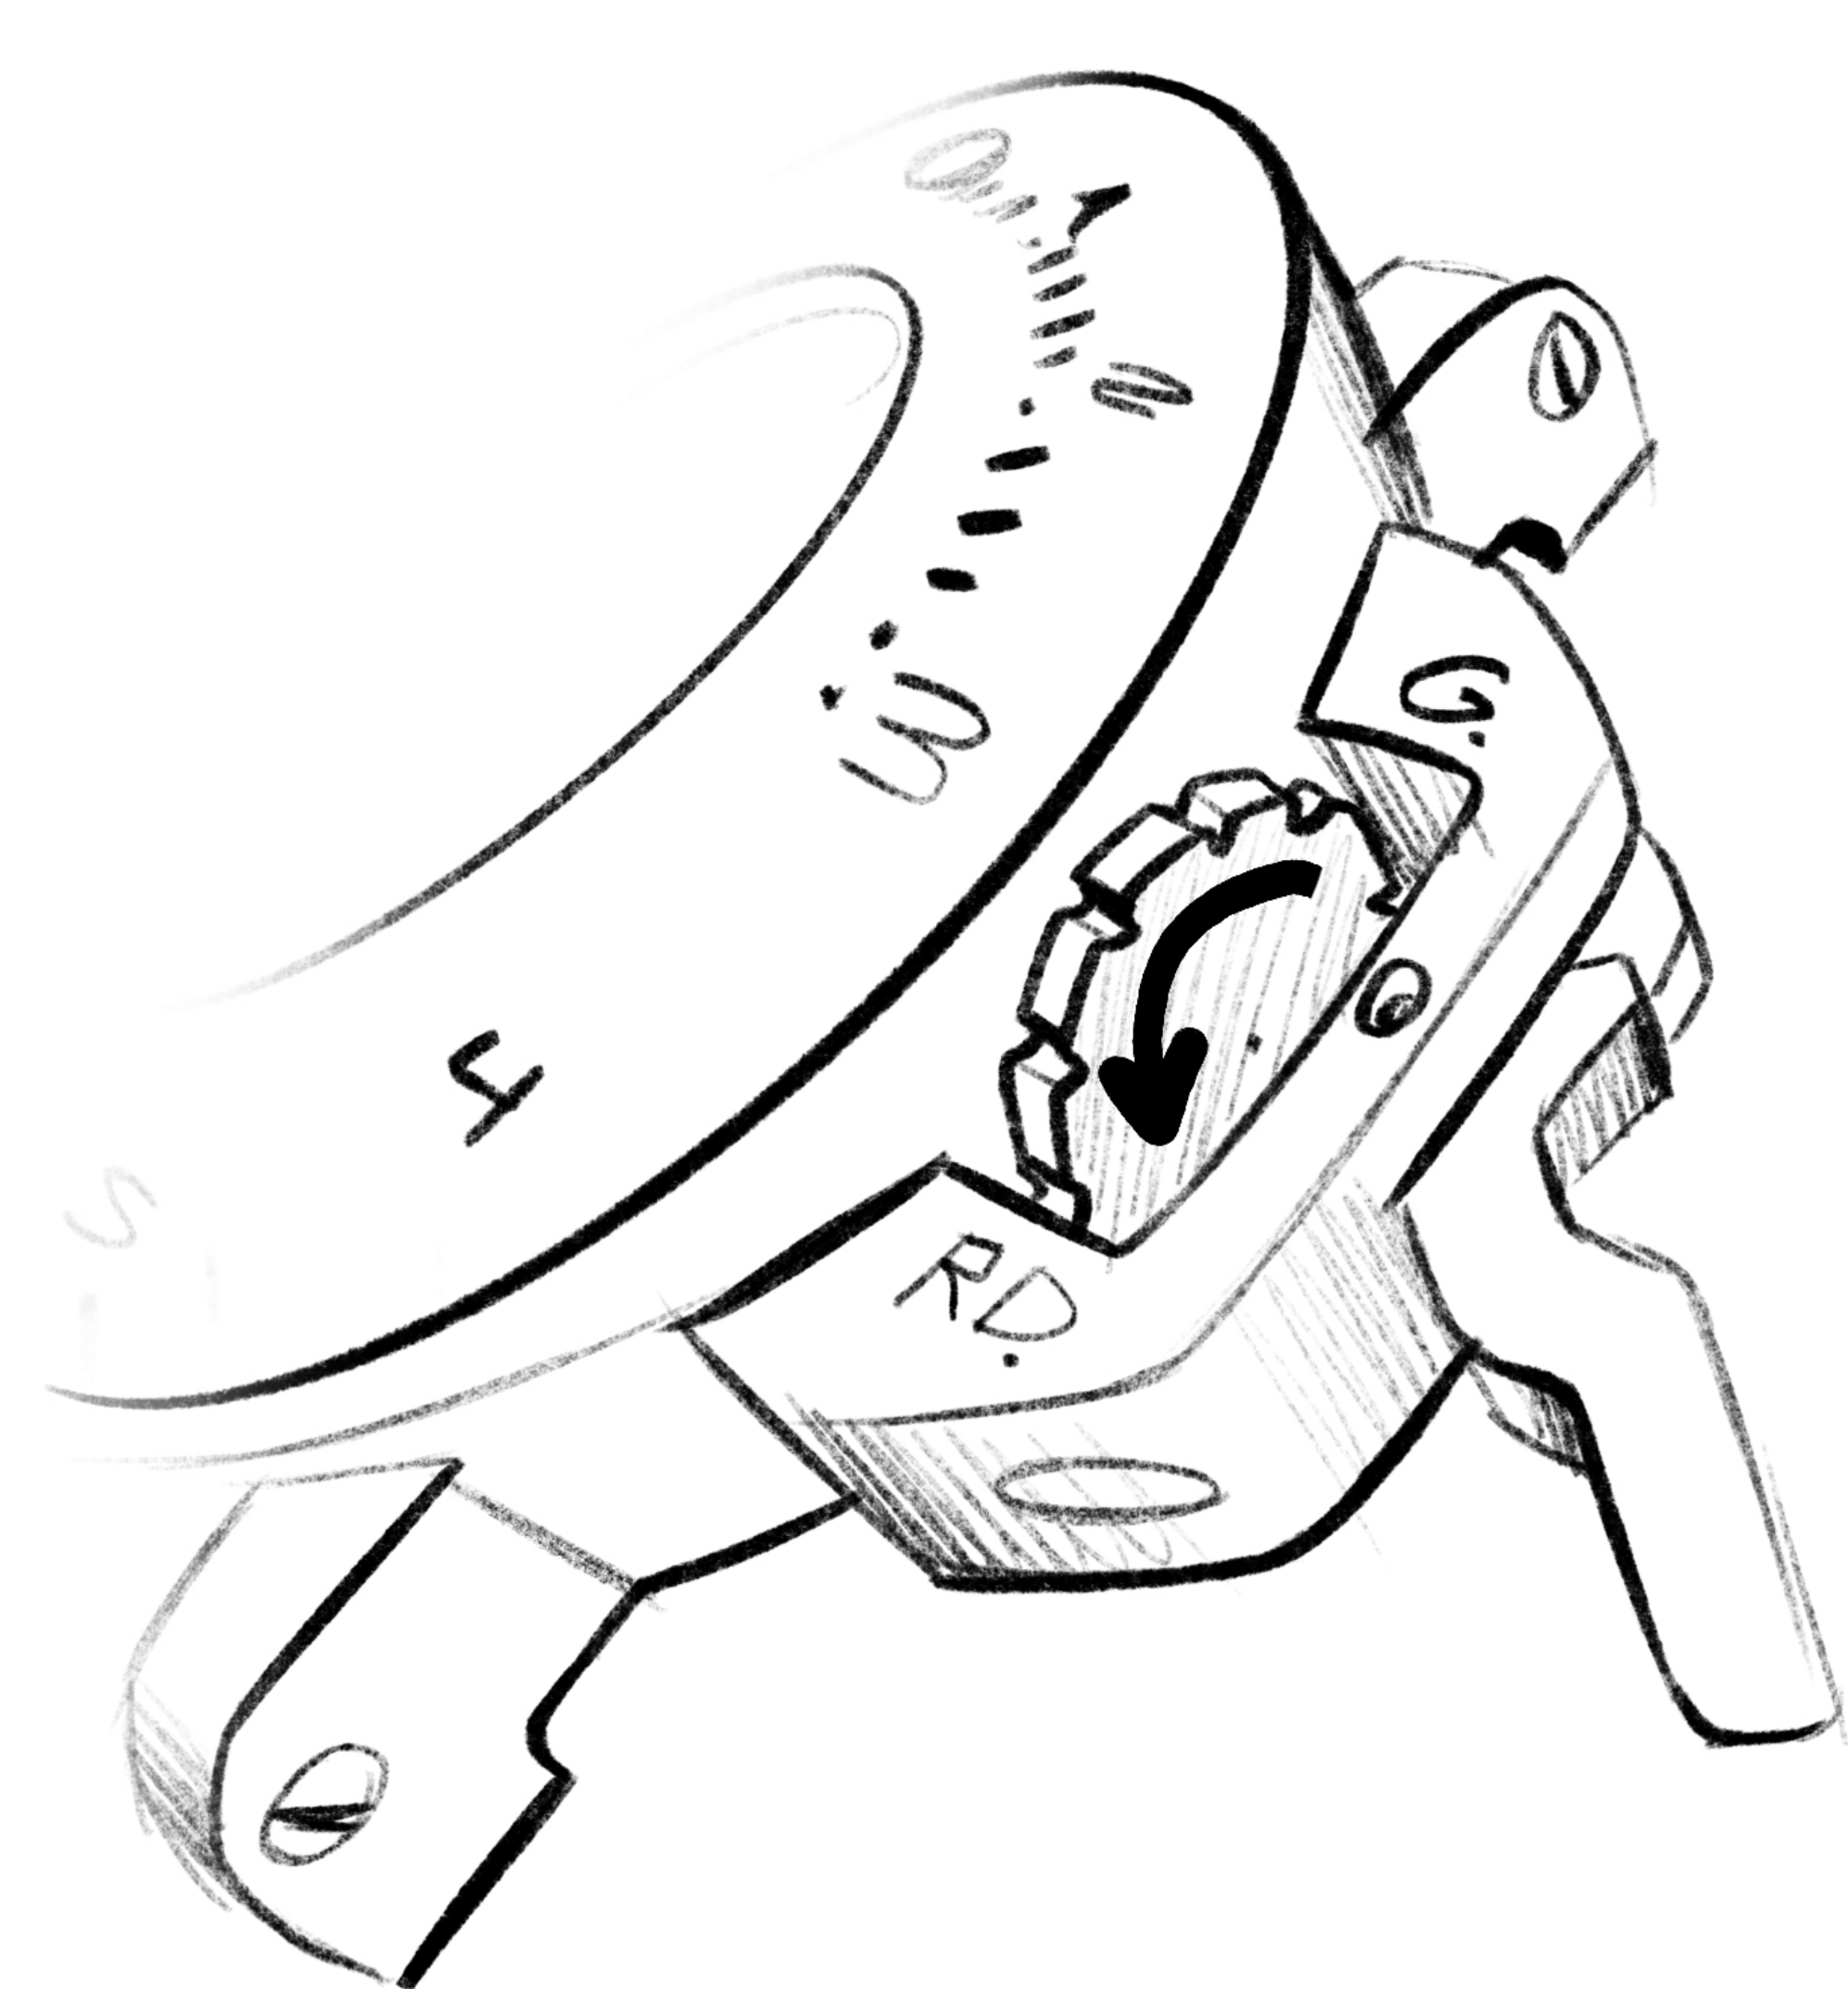

Unscrew the crown
counterclockwise

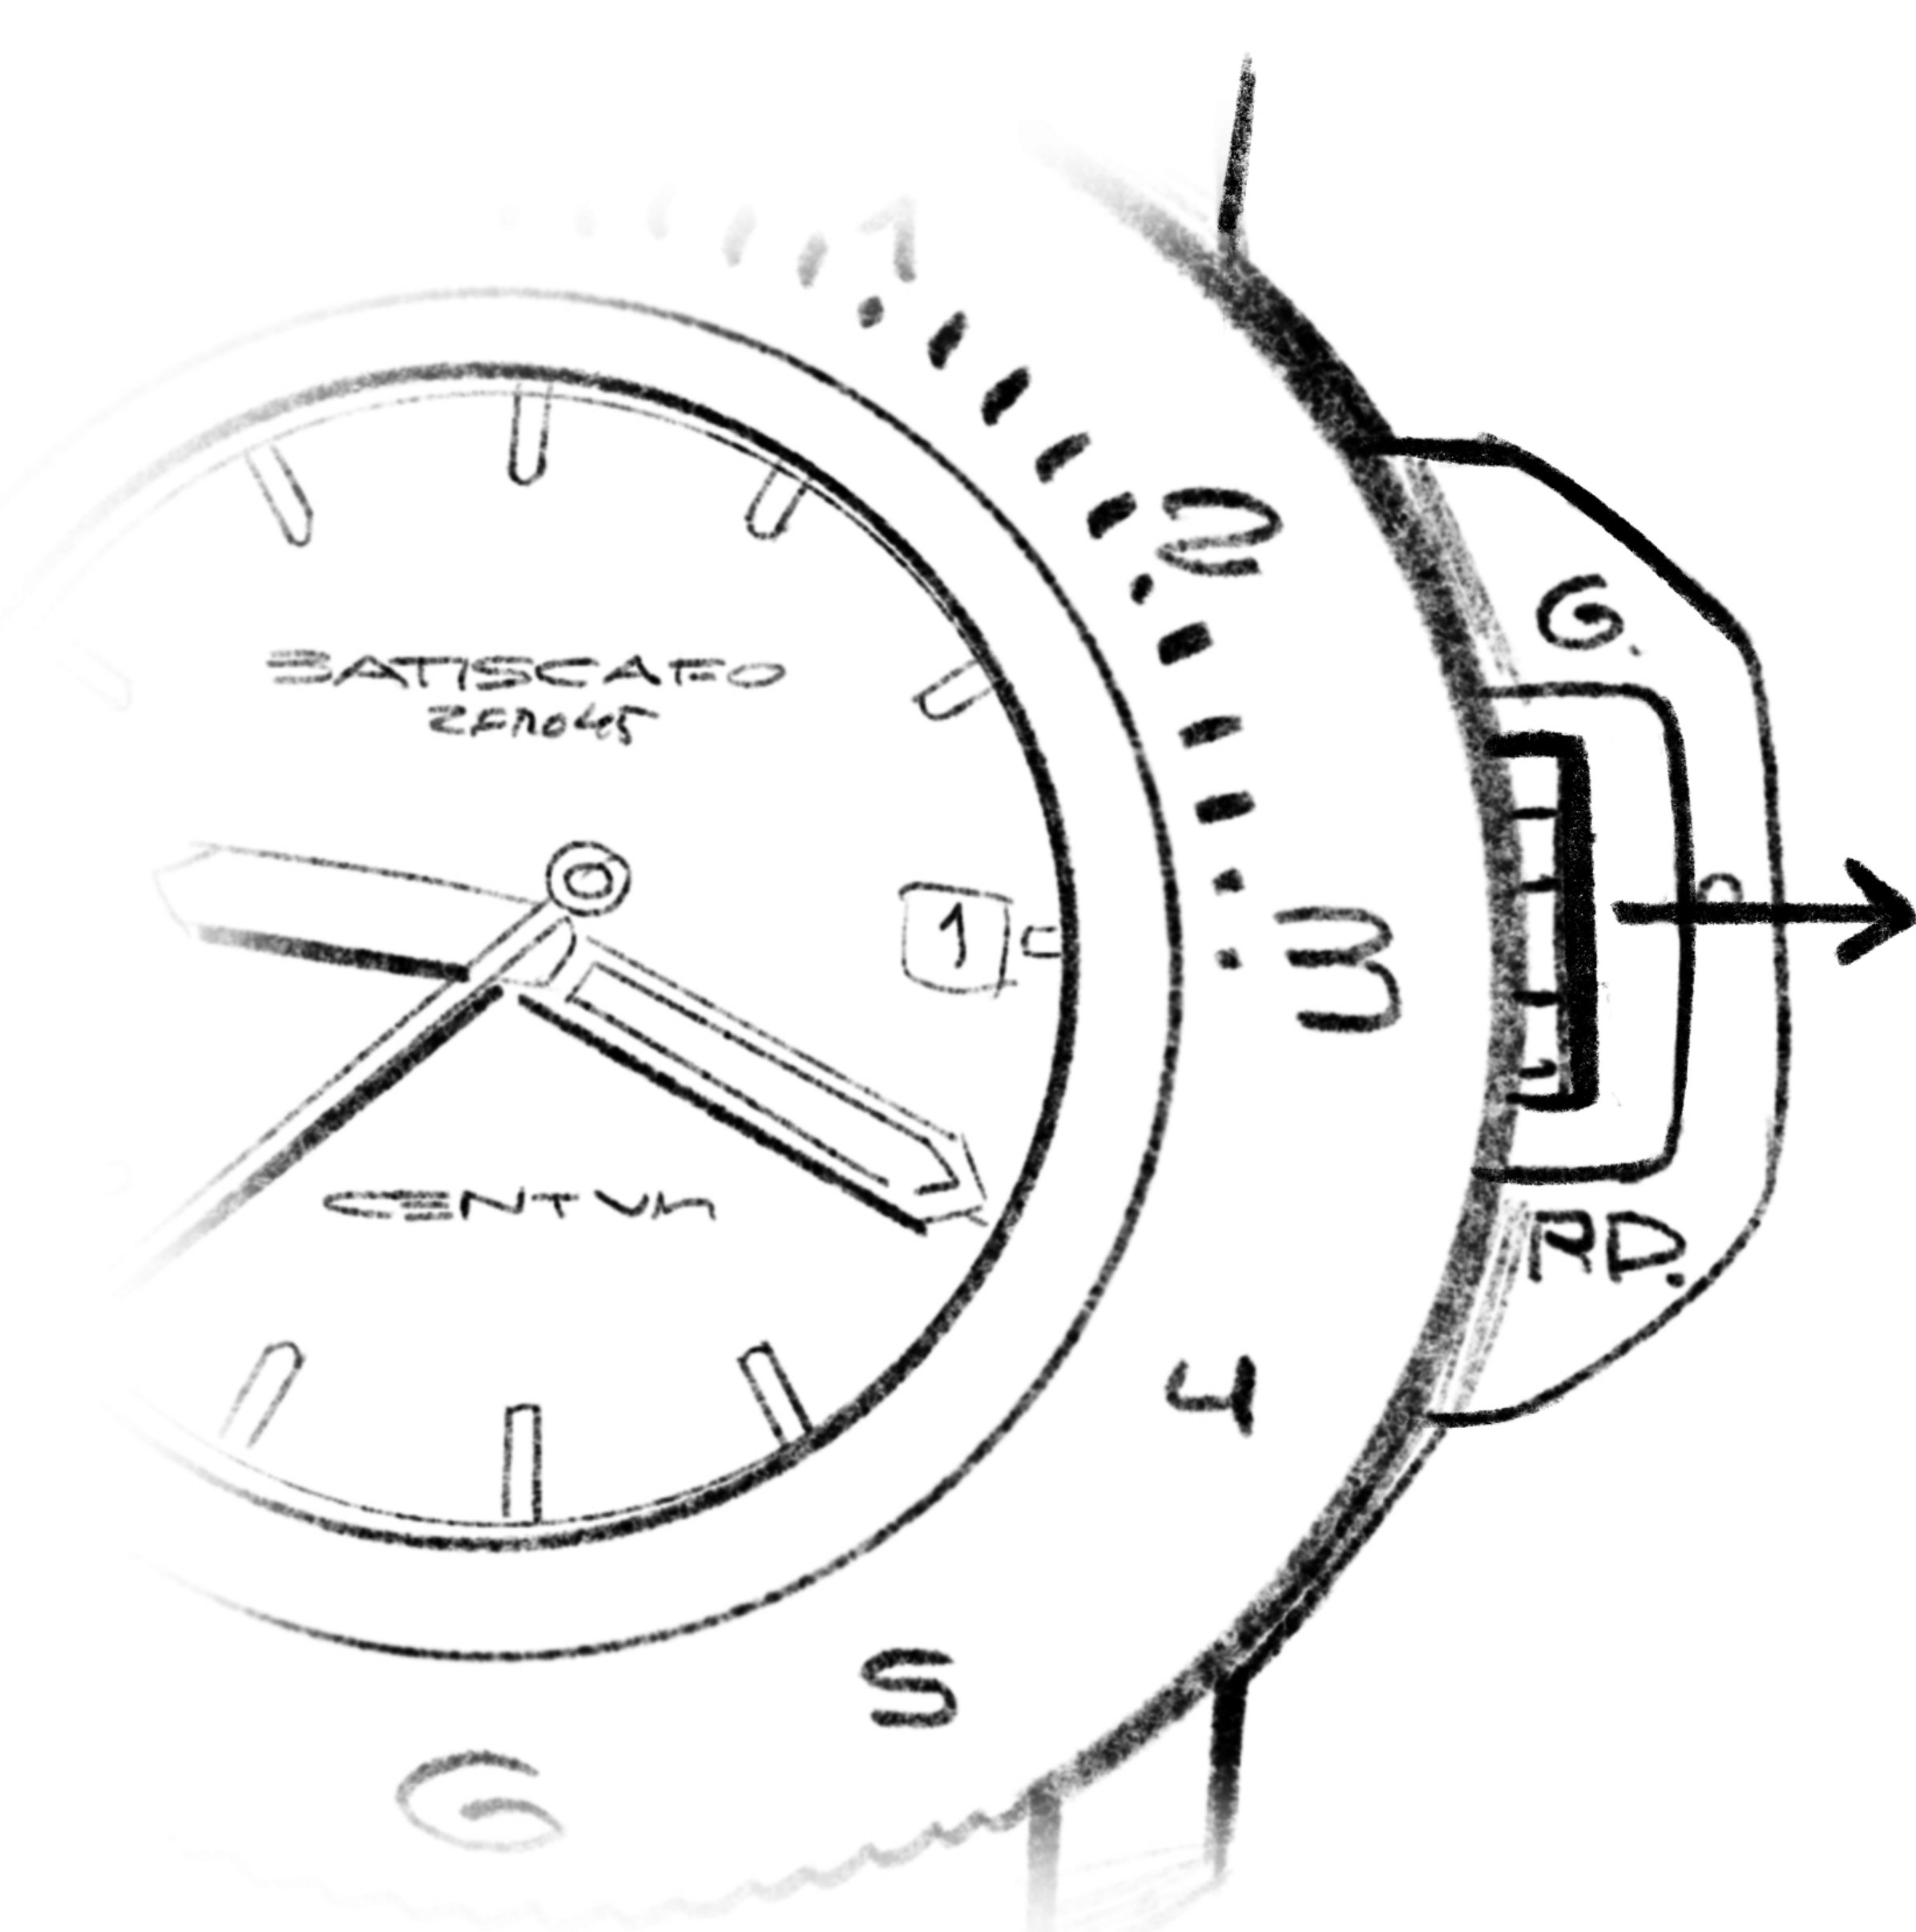

pull out the crown

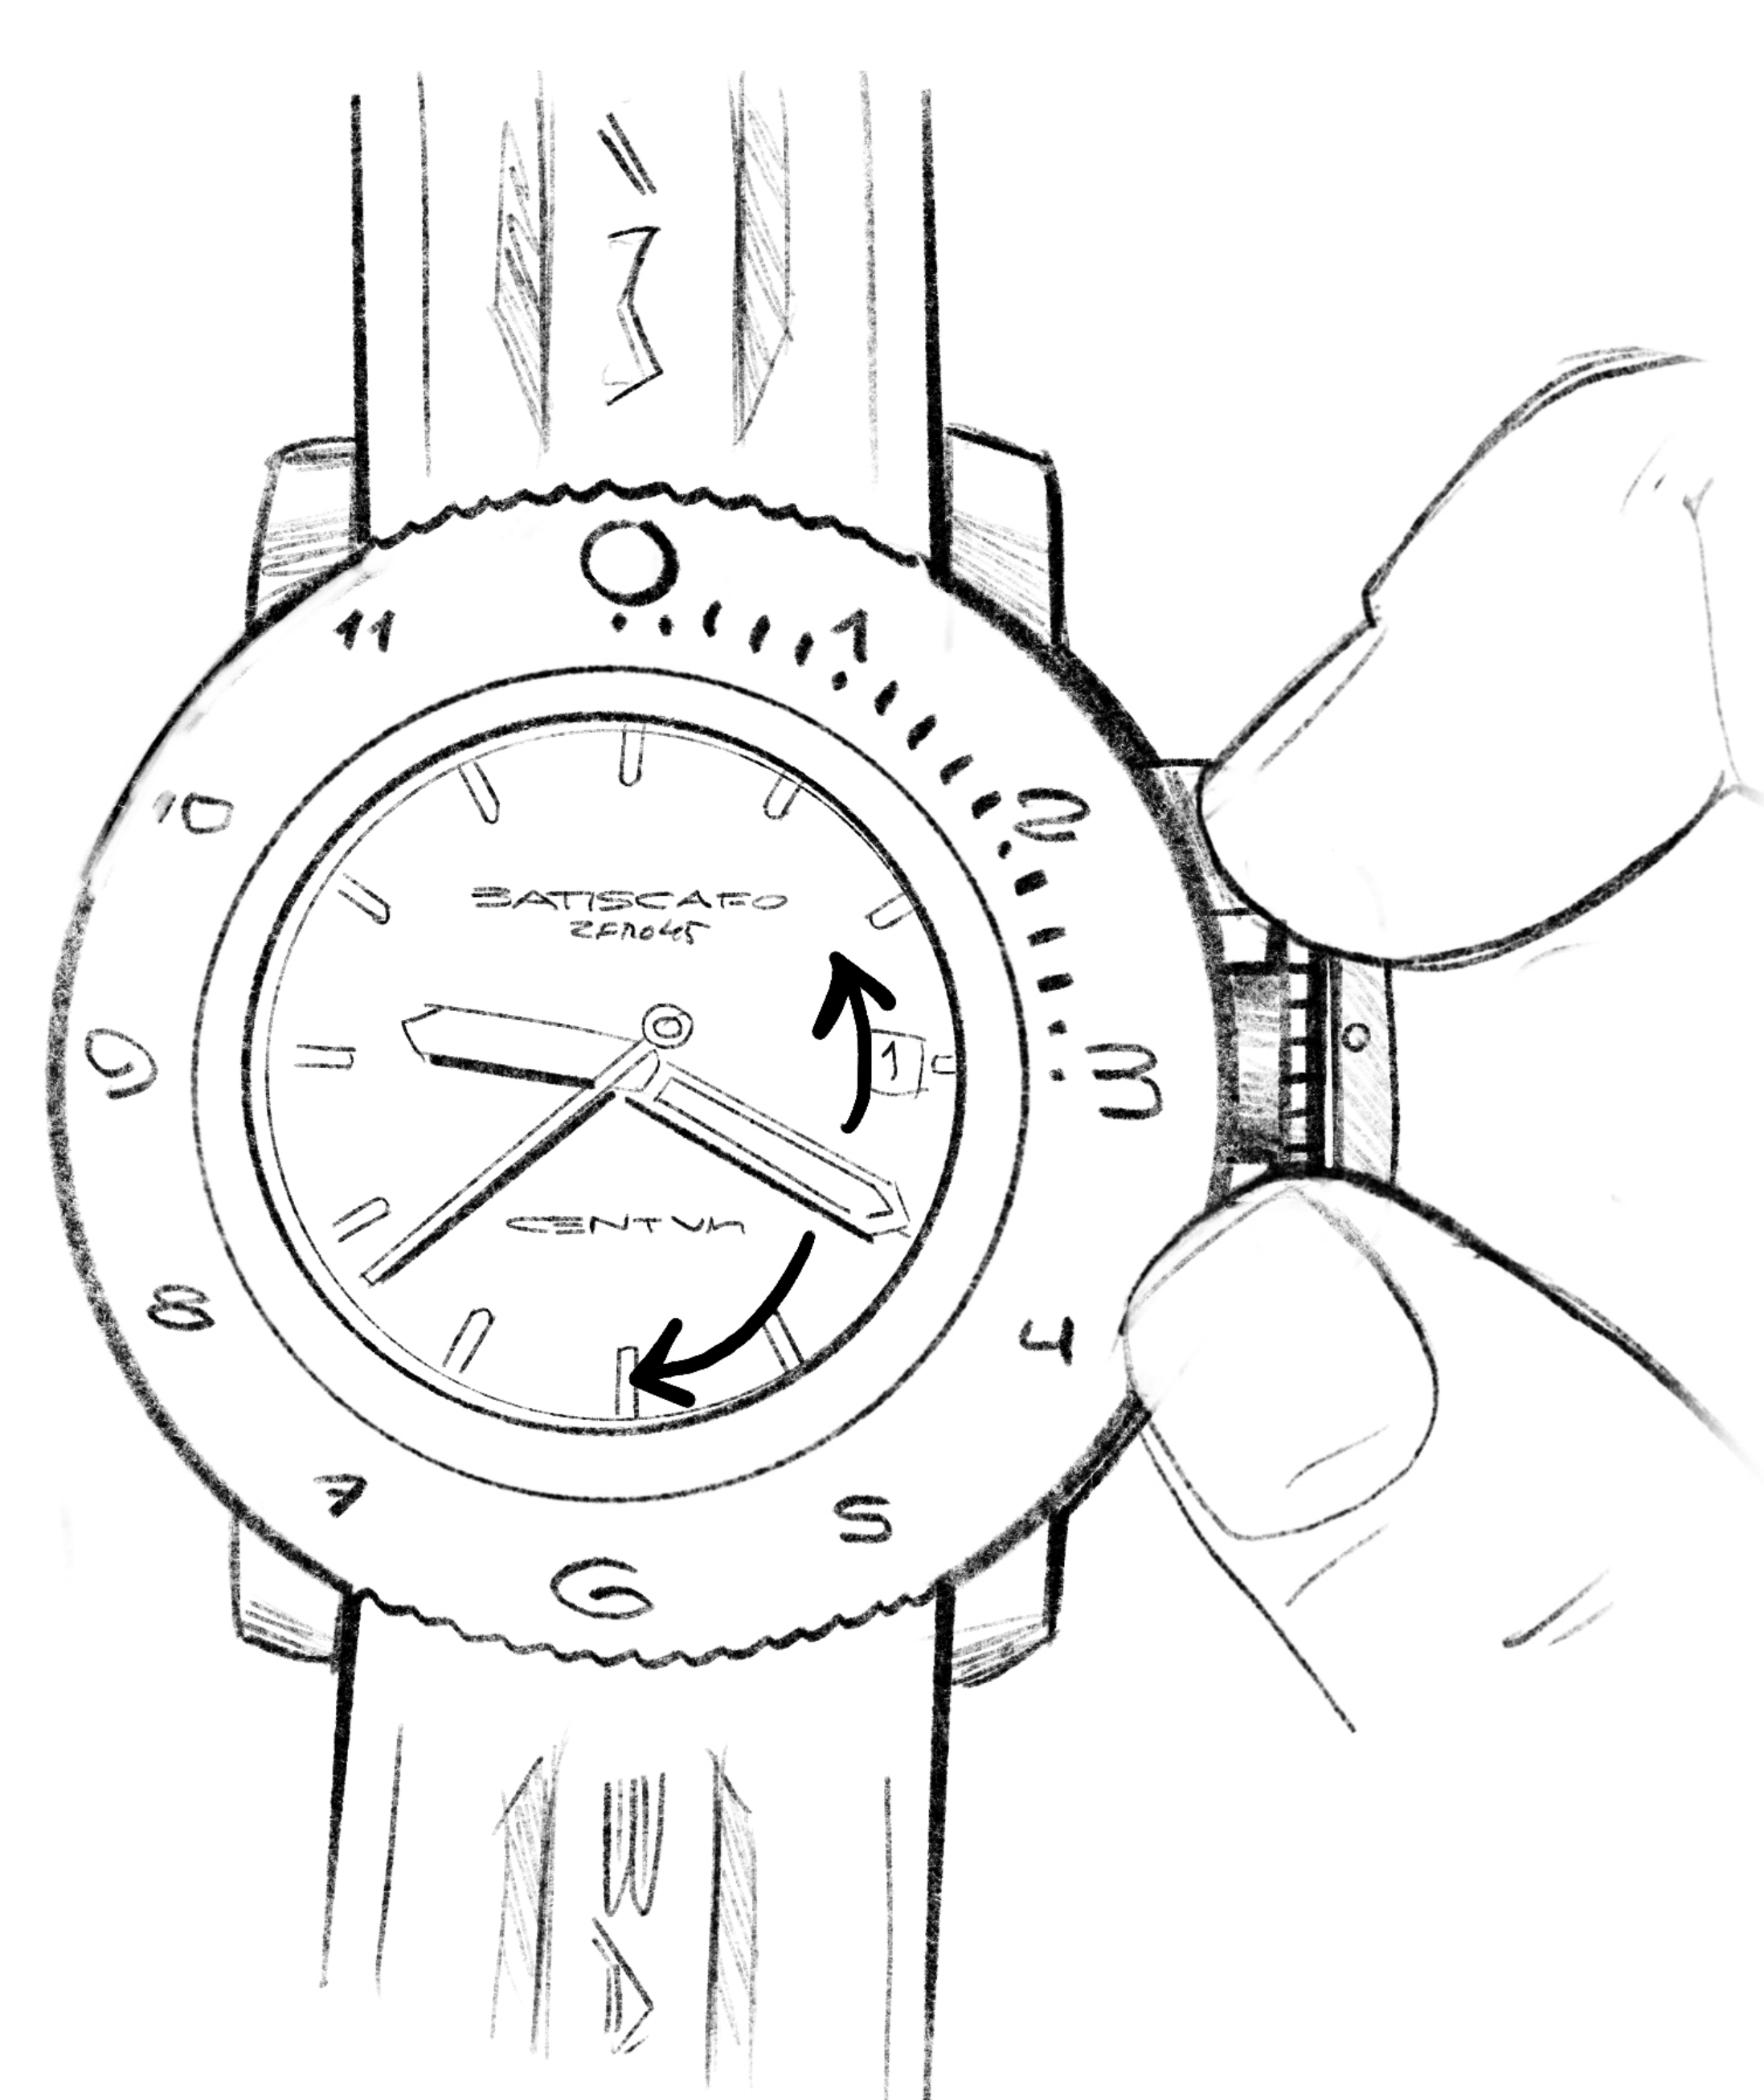


Setting the Time


- Pull the crown to Position 2 (second click).
- Turn the crown to set the correct time.
- Push the crown back in to restart the watch.

Setting the Date (if applicable)


- Pull the crown to Position 1 (first click). Set date by rotating crown for ETA2824 clockwise for Seiko NH35A counterclockwise
- Note: Never adjust the date between 9 PM and 3 AM to avoid damaging the movement.

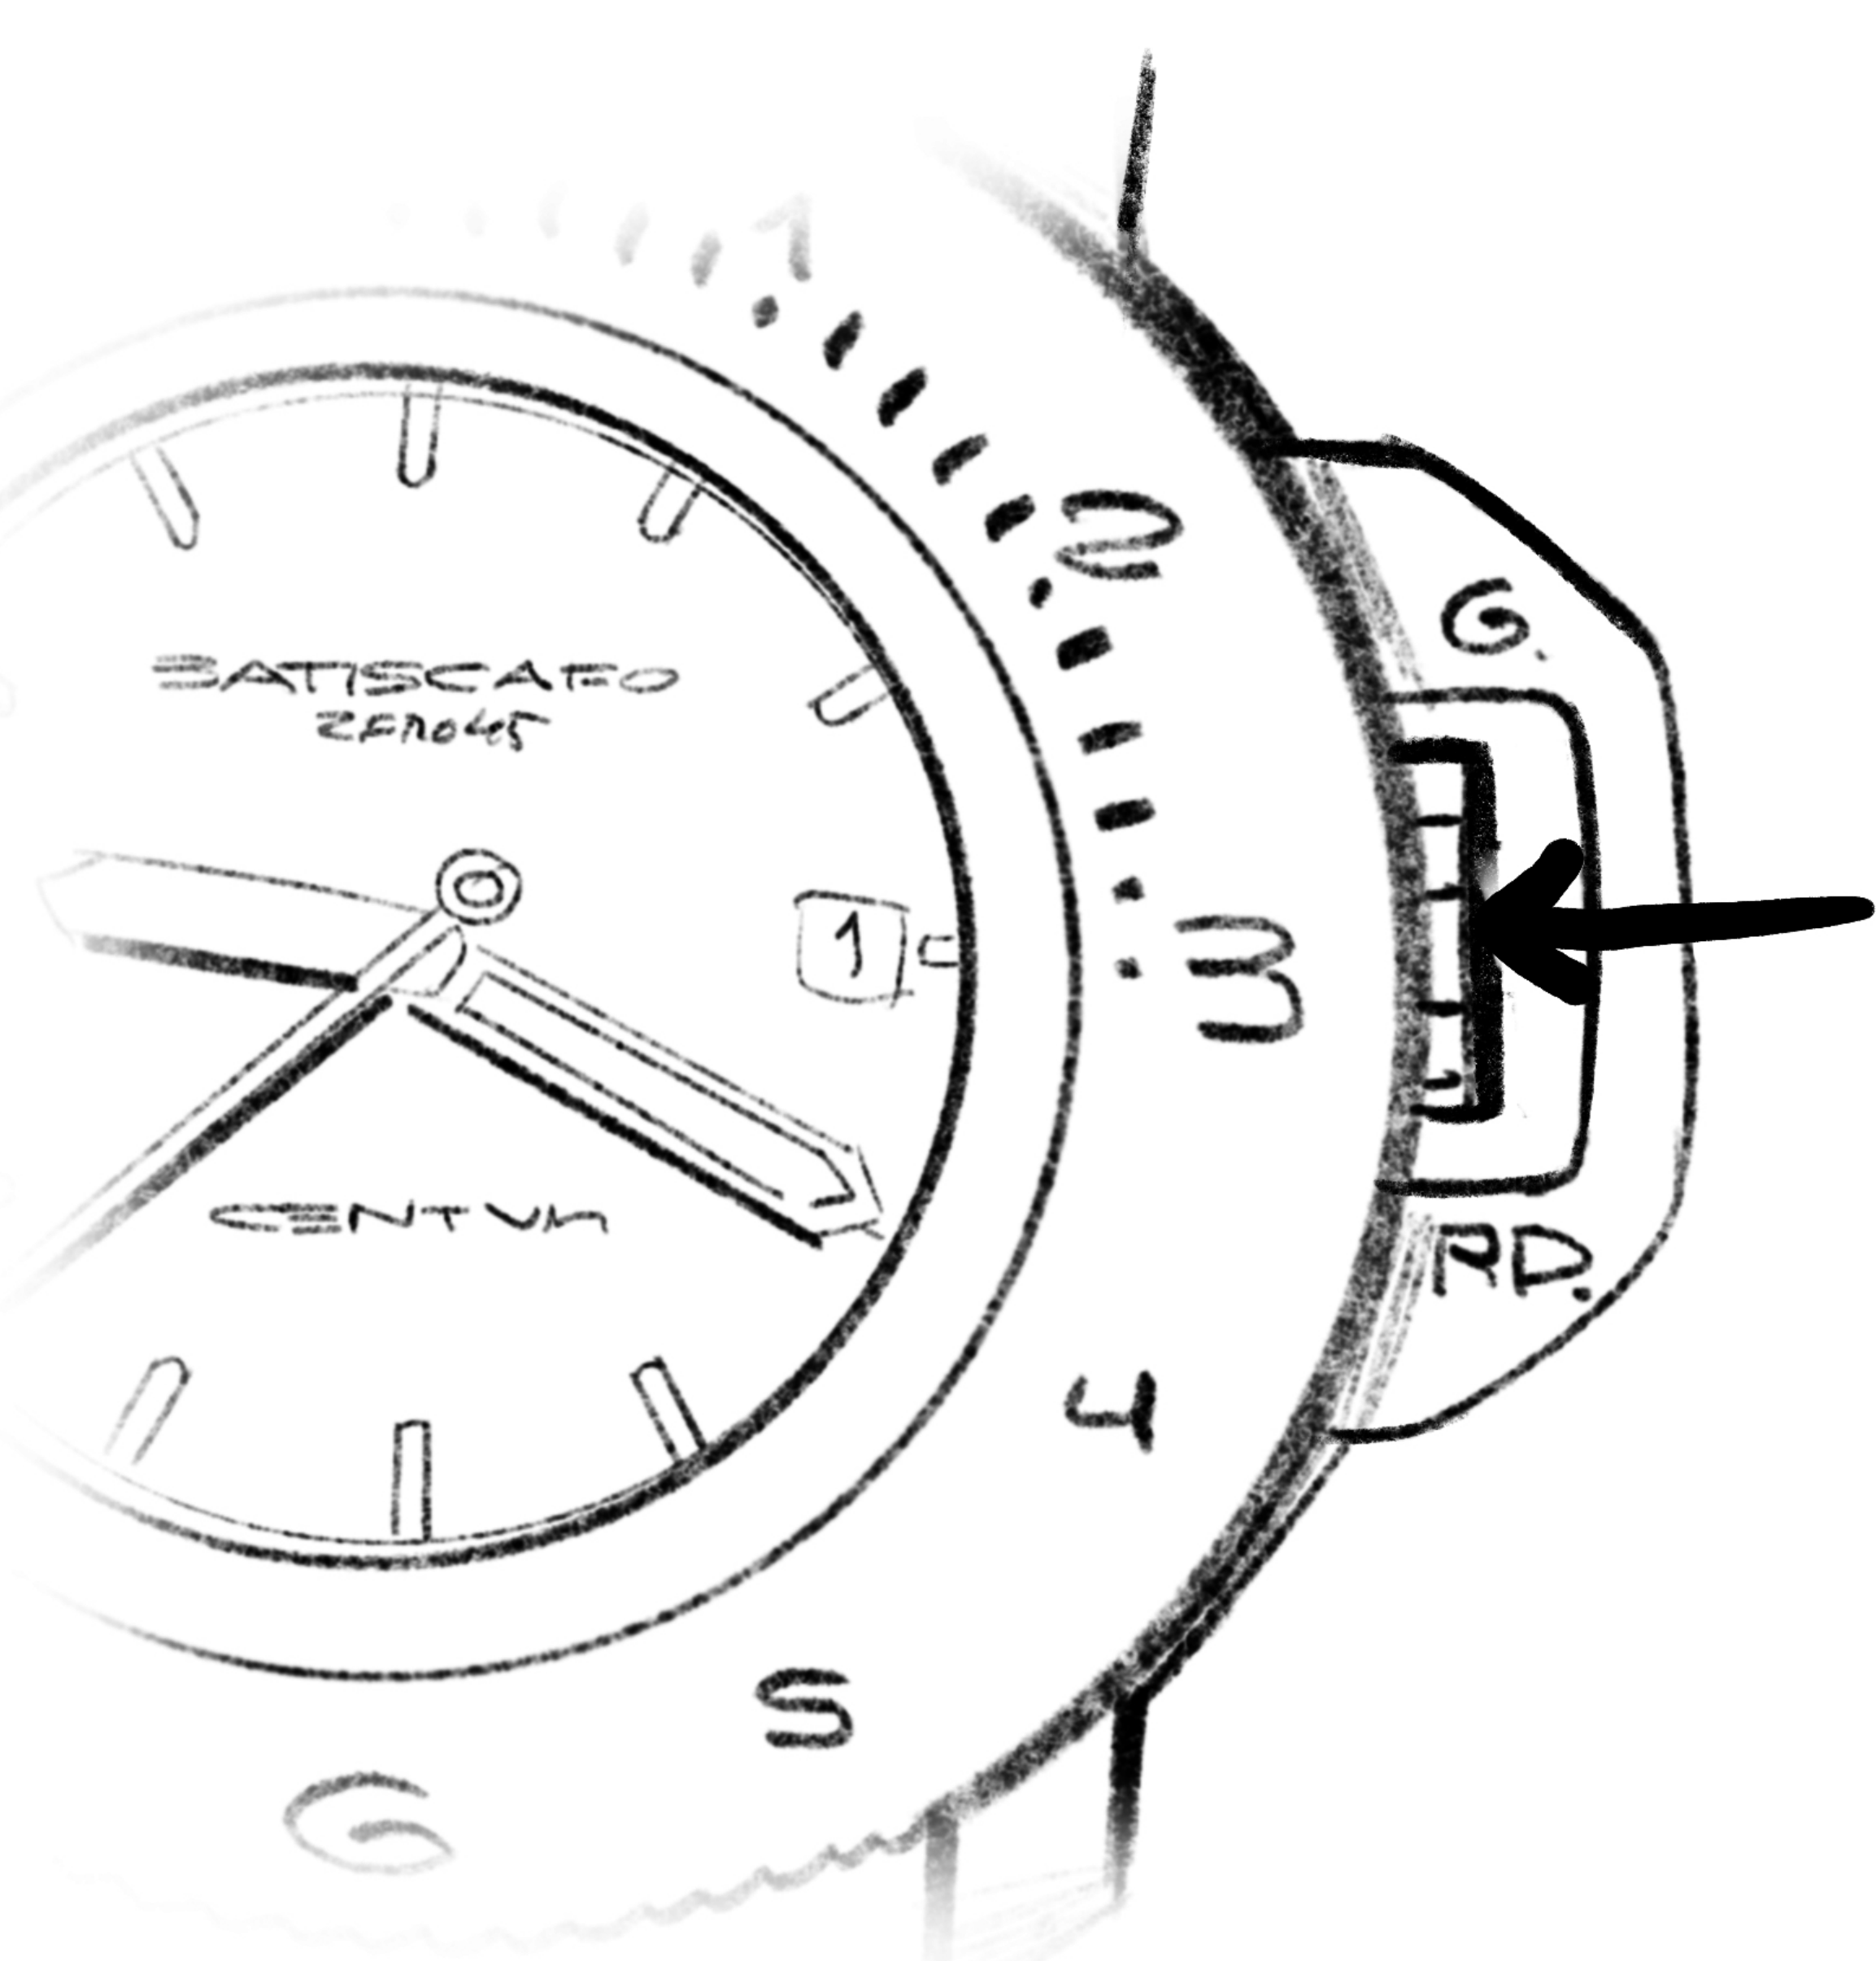

pull in the crown until
you feel it fits the
position

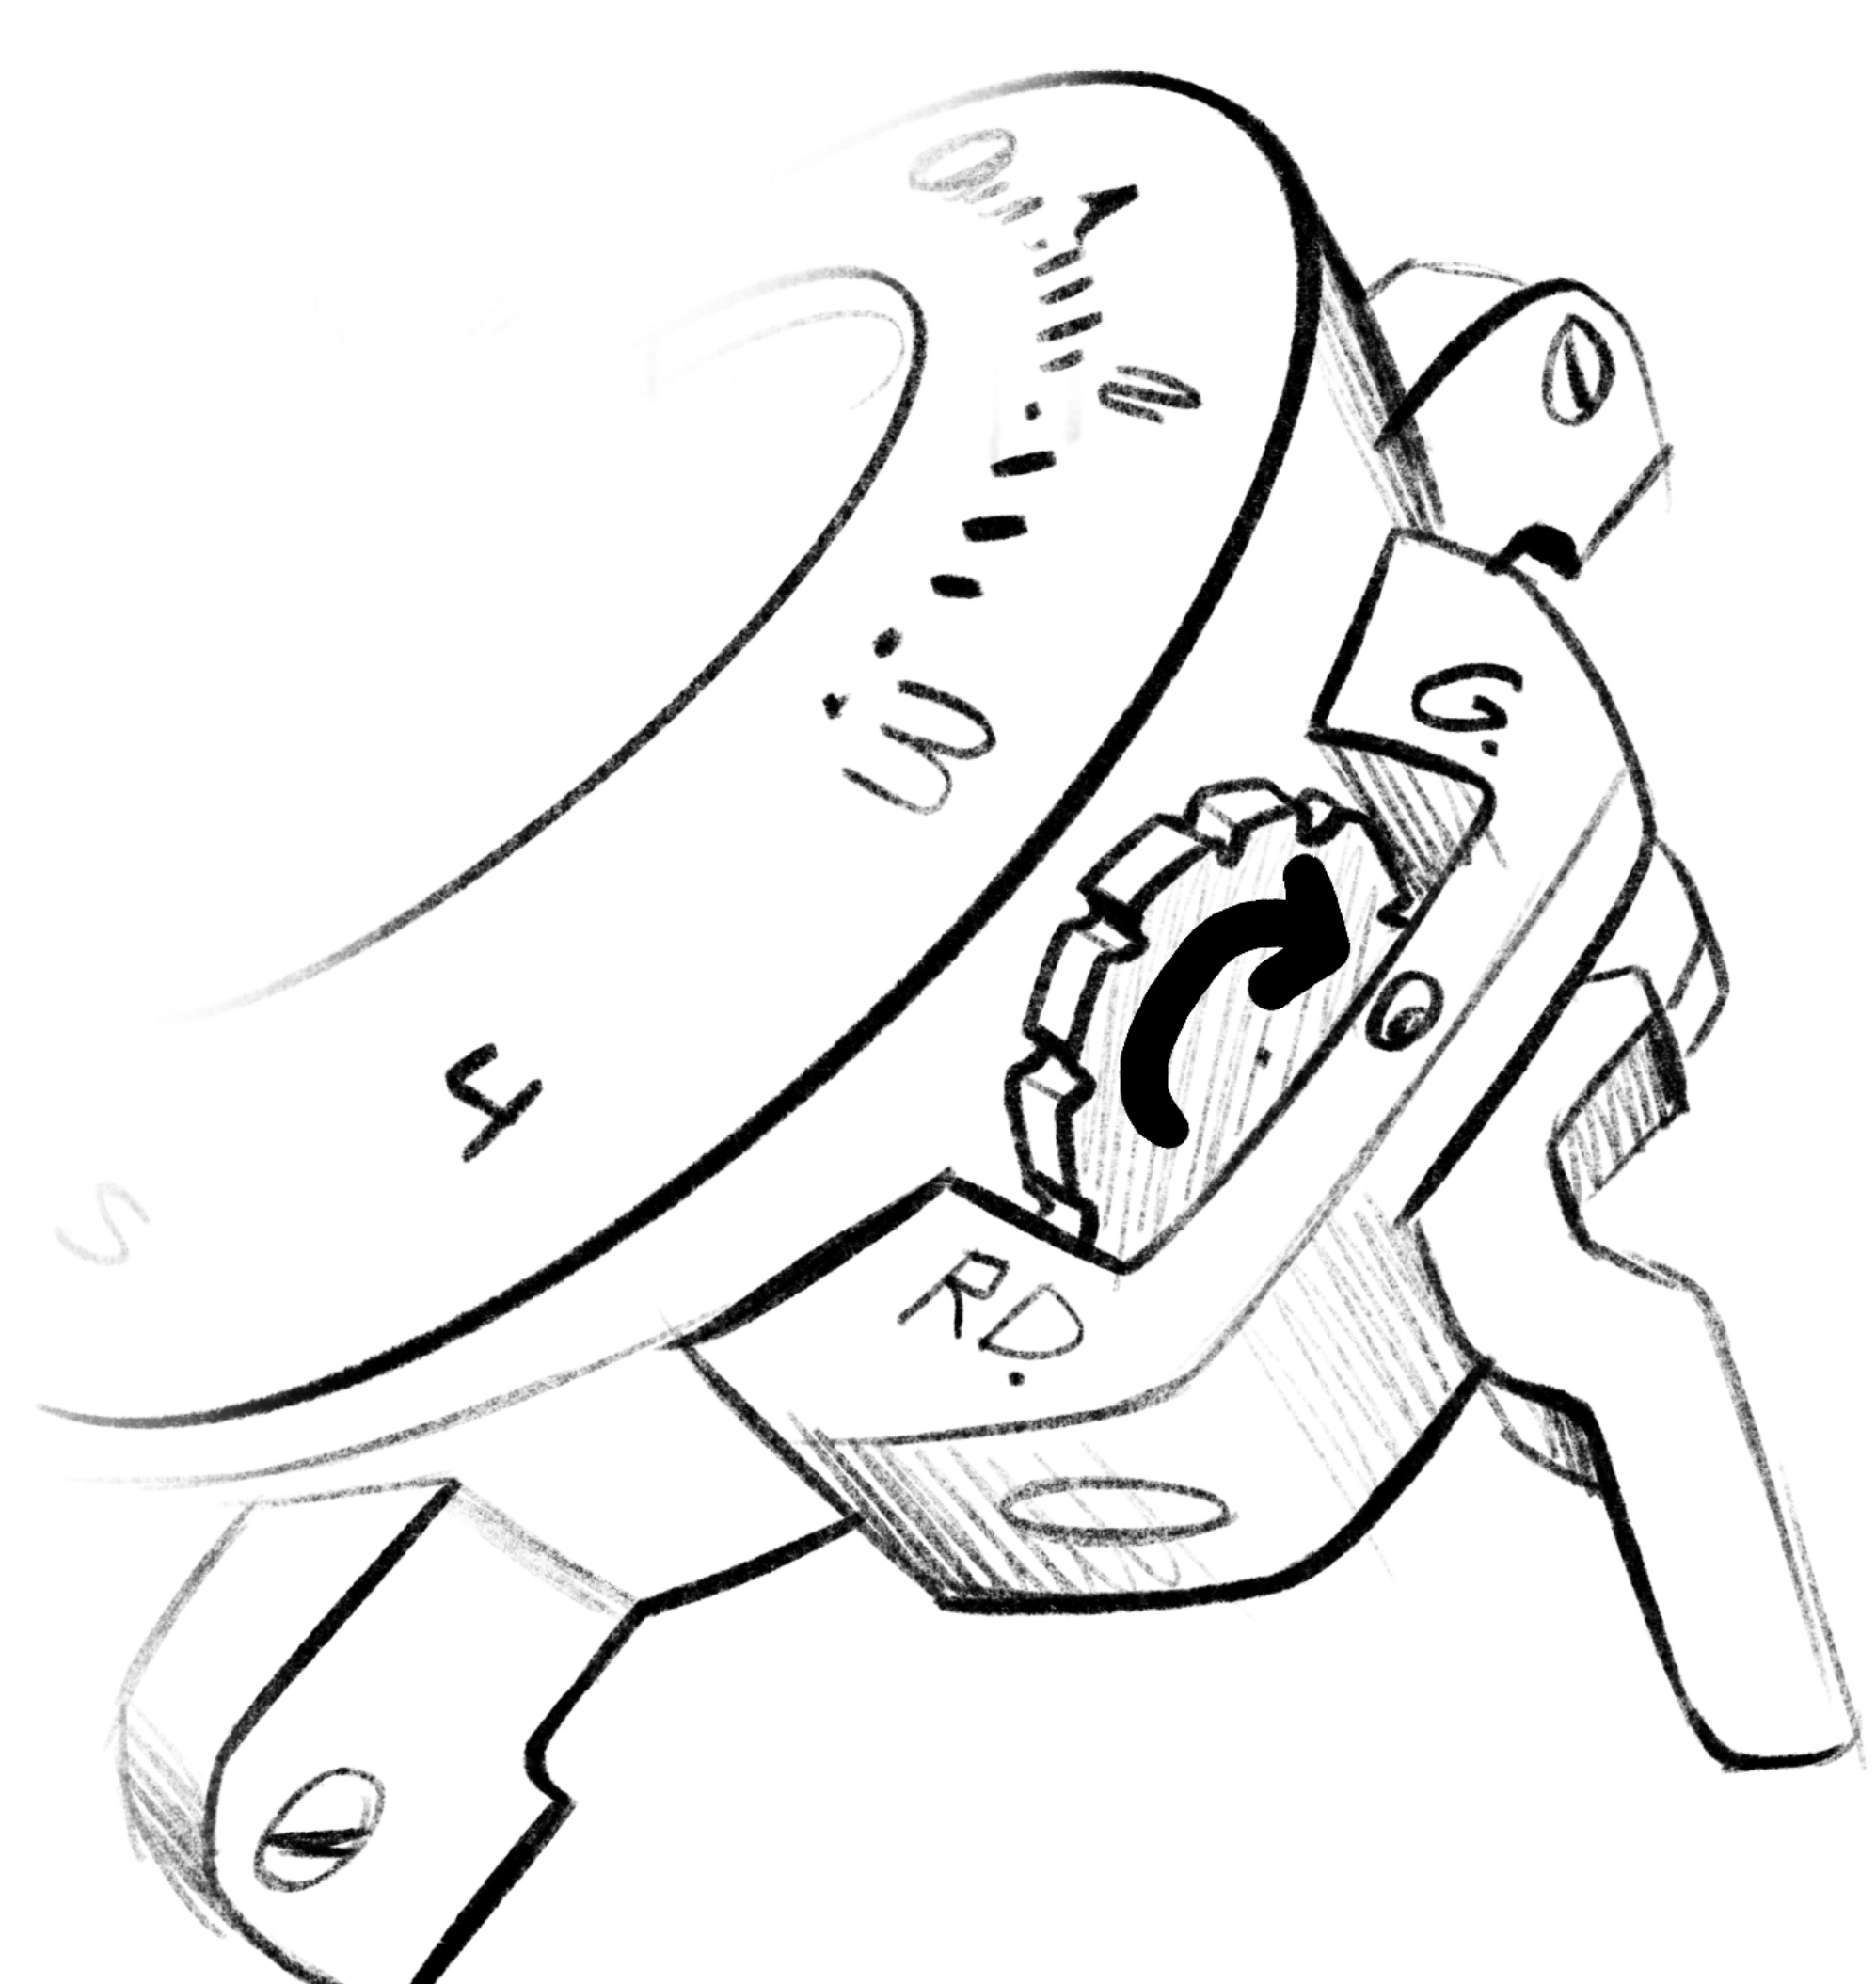

- After setting the time and date, push the crown back in and screw it clockwise to ensure it is sealed.
- Lower the crown guard lever to lock the crown in place.

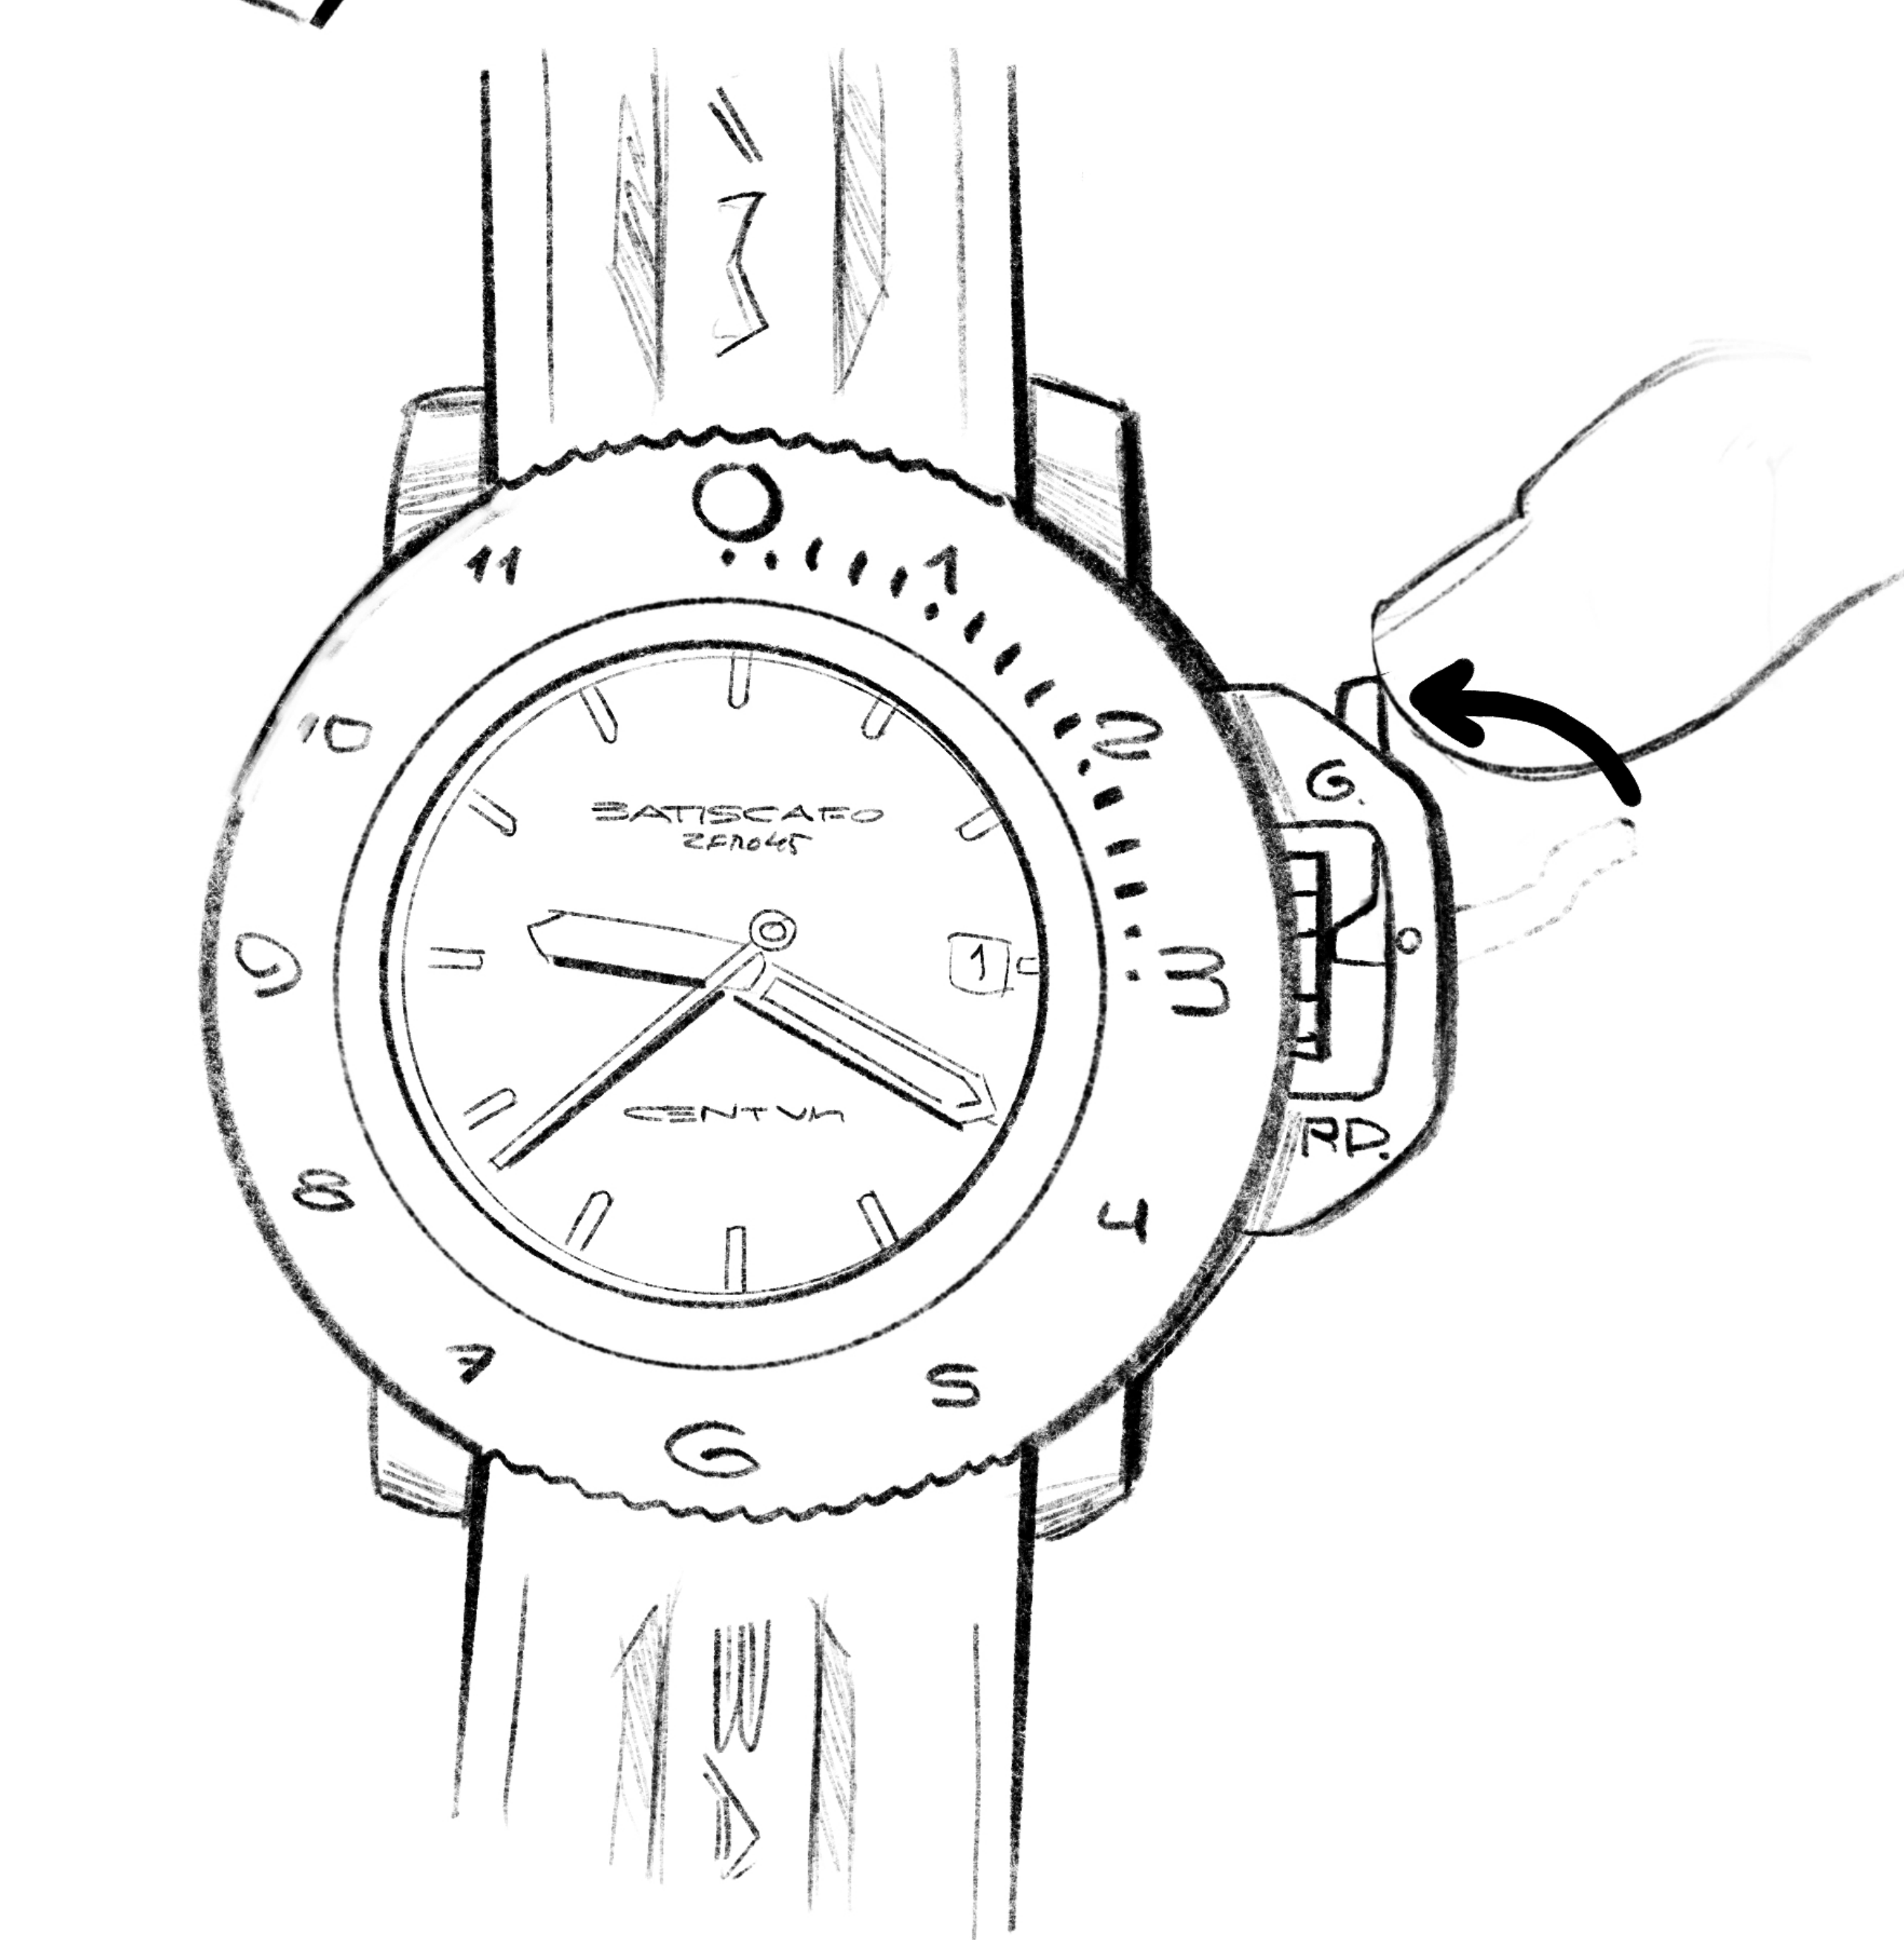

Tilt in the crown guard
buckle

Do not open the crown protection buckle under water.
Do not make any watch time or date adjustments under water.